

# LIFT SHAFT GATE



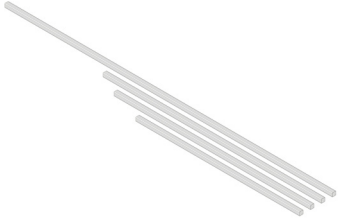









## TECHNICAL INFORMATION



**WE  
SAVE  
LIVES**


**SAFETYRESPECT®**
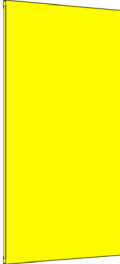
## COMPONENTS

 <p><b>LIFT SHAFT DOOR</b> Part no. 5071201</p> <ul style="list-style-type: none"> <li>• Can be fully opened, or just the upper half. The integrated lock prevents unauthorised entry.</li> <li>• No fire rating.</li> <li>• Weight 39 kg.</li> </ul>	 <p><b>LIFT SHAFT DOOR SOLID</b> Part no. 5071221</p> <ul style="list-style-type: none"> <li>• Can be fully opened, or just the upper half. The integrated lock prevents unauthorised entry.</li> <li>• No fire rating.</li> <li>• Weight 45 kg.</li> </ul>	 <p><b>SUSPENSION TUBE</b> Part no. 5071205/5071206/5071207/5071208</p> <ul style="list-style-type: none"> <li>• Forms the basic framework of the lift shaft gate</li> <li>• Width 1500/1800/2000/3000 mm.</li> <li>• Weight 3,0/3,5/4,0/6,0 kg.</li> </ul>
 <p><b>FIXING BRACKET, TOP</b> Part no. 5071209</p> <ul style="list-style-type: none"> <li>• Anchors to the wall inside or outside. Holds the upper suspension tube. Two brackets are needed per lift shaft gate.</li> <li>• Weight 0,5 kg.</li> </ul>	 <p><b>FIXING BRACKET, BOTTOM</b> Part no. 5071210</p> <ul style="list-style-type: none"> <li>• Anchors to the wall inside or outside. Holds the lower suspension tube. Two brackets are needed per lift shaft gate.</li> <li>• Weight 0,5 kg.</li> </ul>	 <p><b>PANEL 200</b> Part no. 5071202</p> <ul style="list-style-type: none"> <li>• Covers the sides of the shaft opening.</li> <li>• Width 200 mm.</li> <li>• Weight 10,5 kg.</li> </ul>
 <p><b>PANEL 400</b> Part no. 5071203</p> <ul style="list-style-type: none"> <li>• Covers the sides of the shaft opening.</li> <li>• Width 400 mm.</li> <li>• Weight 17,5 kg.</li> </ul>	 <p><b>PANEL 1060</b> Part no. 5071204</p> <ul style="list-style-type: none"> <li>• Covers the sides of the shaft opening.</li> <li>• Width 1060 mm.</li> <li>• Weight 40 kg.</li> </ul>	 <p><b>GAP COVER 200</b> Part no. 5071211</p> <ul style="list-style-type: none"> <li>• Covers gaps between the door and the upper edge of the shaft opening.</li> <li>• Width 200 mm.</li> <li>• Weight 0,8 kg.</li> </ul>
 <p><b>GAP COVER 400</b> Part no. 5071212</p> <ul style="list-style-type: none"> <li>• Covers gaps between the door and the upper edge of the shaft opening.</li> <li>• Width 400 mm.</li> <li>• Weight 1,5 kg.</li> </ul>	 <p><b>GAP COVER 1000</b> Part no. 5071213</p> <ul style="list-style-type: none"> <li>• Covers gaps between the door and the upper edge of the shaft opening.</li> <li>• Width 1000 mm.</li> <li>• Weight 3,3 kg.</li> </ul>	 <p><b>GAP COVER 1060</b> Part no. 5071214</p> <ul style="list-style-type: none"> <li>• Covers gaps between the door and the upper edge of the shaft opening.</li> <li>• Width 1060 mm.</li> <li>• Weight 3,8 kg.</li> </ul>


## QUICK GUIDE

The Lift Shaft Gate can be mounted on either the interior or exterior of the shaft.

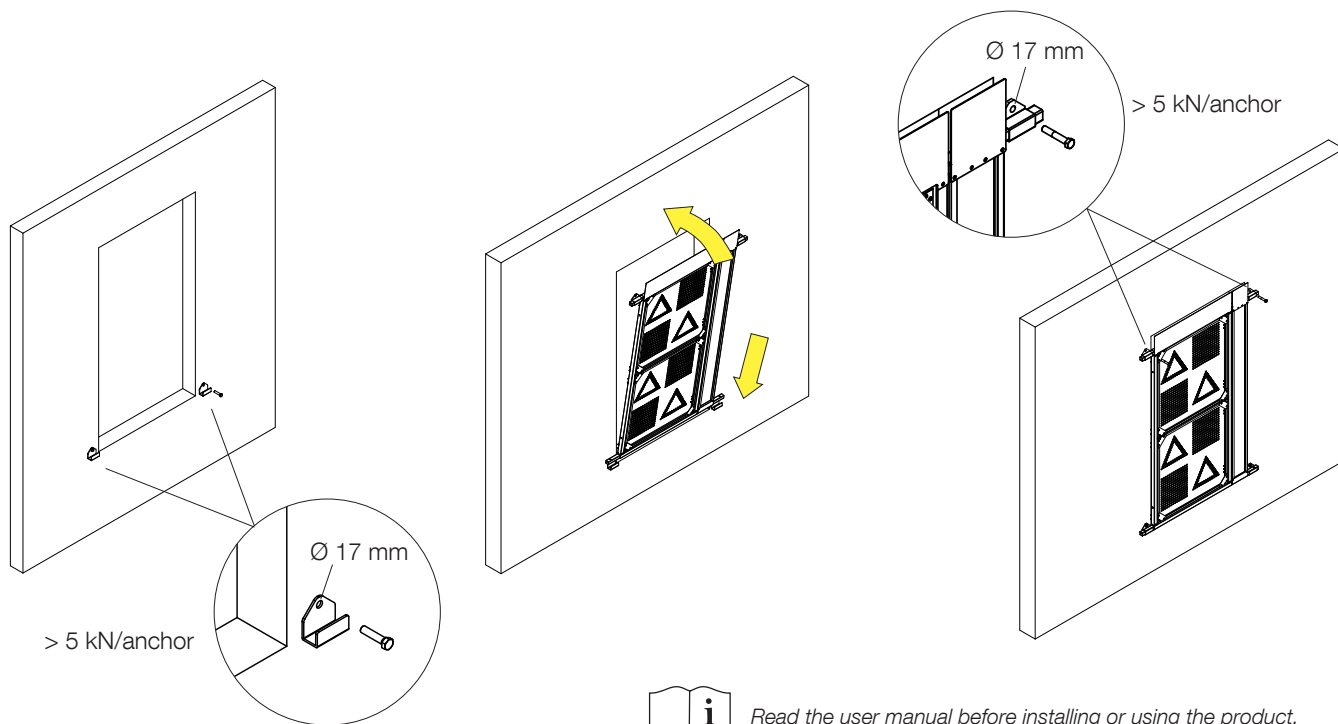



Read the user manual before installing or using the product.

## SPECIFICATIONS

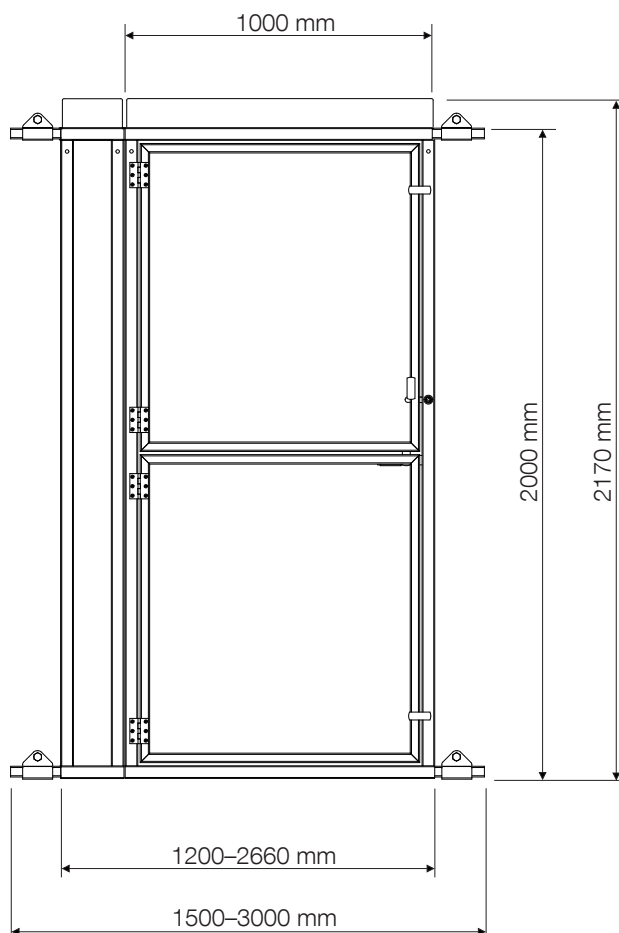

# CONFIGURATIONS

A variety of standard lift shaft openings can be secured using a few key components. The examples below illustrate some common configurations. For other solutions, please contact SafetyRespect.

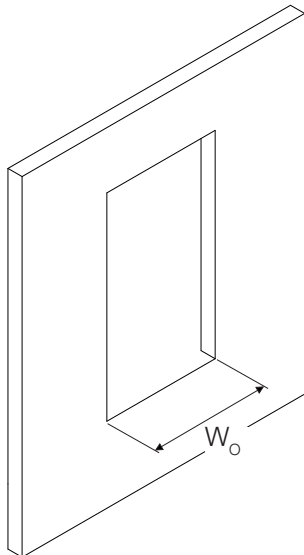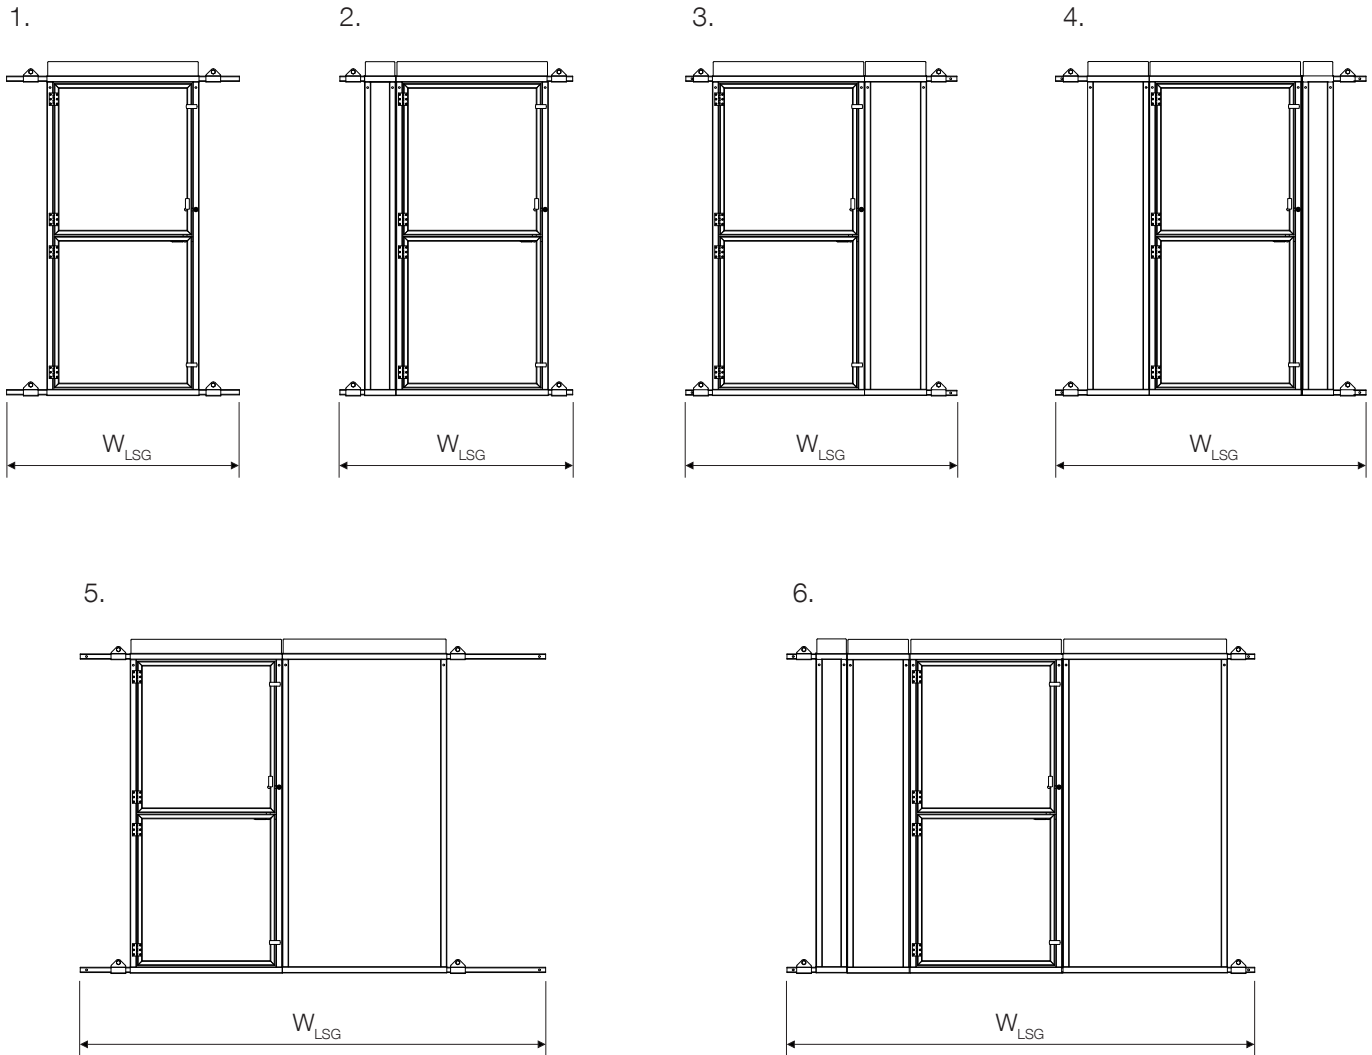

NO.	$W_0$	$W_{LSG}$
1	< 1,00 m	1,50 m
2	< 1,20 m	1,50 m
3	< 1,40 m	1,80 m
4	< 1,60 m	2,00 m
5	< 2,06 m	3,00 m
6	< 2,66 m	3,00 m

Alternative configurations are also available.  $W_0 \leq 2,66$  m.