











PART NO. 912167



BEAM BRACKET R

Balkfäste R | Bjelkefeste R | Sijos kronšteinas R | Kiriş braketi R | H20-Klemme

-  L: 200 mm
-  W: 230 mm
-  H: 360 mm
-  4,5 kg
-  Steel + Zn (hot dip galvanized)
-  EN13374 – A



-  1,03 × 0,91 × 0,65 m
-  265 kg
-  50 pcs

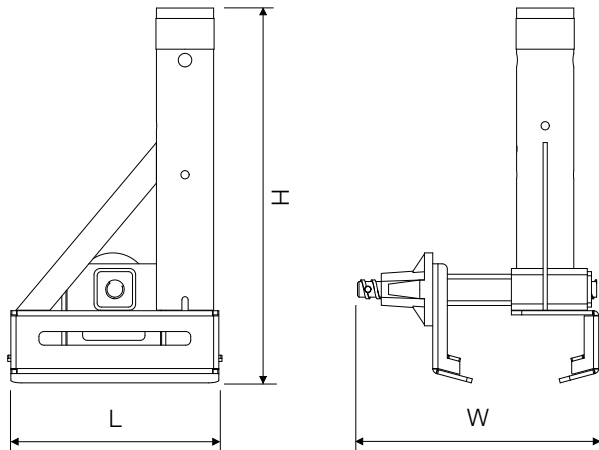

BENDING MOMENT (Q) ¹ (Unfactored)	
M_k	720 Nm
¹⁾ Loads acc. to EN 13374:2013 $Q_{ed} \times \gamma_F^* = E_d \leq R_d = R_k / \gamma_M (k_{mod}^{**})$ $* \gamma_F = 1,5$ ** for timber	

