












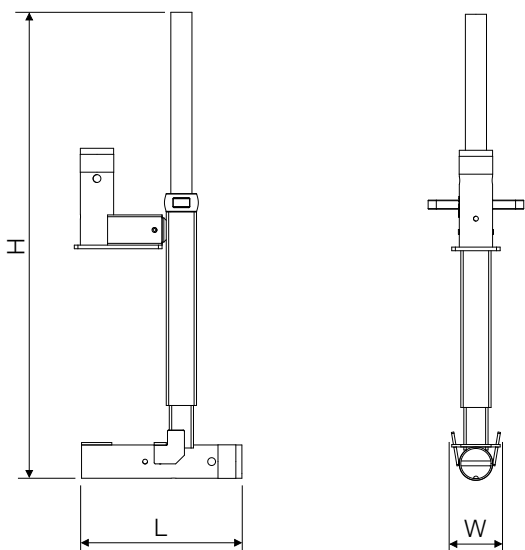
PART NO. 912220

CLAMP 550

Tving 550 | Tvinge 550 komplett | Sraigine apkaba 550 | Kelepçe 550

-  L: 265 mm
-  W: 80 mm
-  H: 770 mm
-  8,2 kg
-  Steel + Zn (hot dip galvanized)
-  EN13374 – A

-   1,03 × 0,91 × 0,65 m
-  290 kg
-  30 pcs



BENDING MOMENT (Q) ¹ (Unfactored)	
M _k	520 Nm
¹) Loads acc. to EN 13374:2013	
$Q_{d1} \times \gamma_F^* = E_d \leq R_d = R_k / \gamma_M (k_{mod}^{**})$	
* $\gamma_F = 1,5$	** for timber

