











PART NO. 912105




POST FOOT

Stolpfot | Statramsčio kojelé | Fuß

-  L: 171 mm
-  W: 153 mm
-  H: 150 mm
-  1,4 kg
-  Steel + Zn (hot dip galvanized)
-  EN13374 – A



-  1,03 × 0,91 × 0,65 m
-  250 kg
-  150 pcs

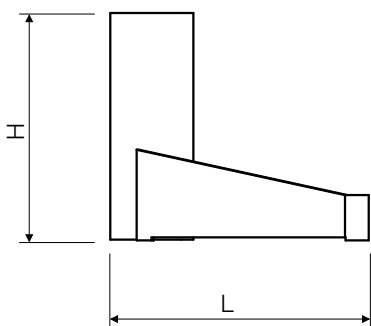

ANCHOR LOADS (Q) ¹ (Unfactored)	
N _k	5,9 kN
V _k	0,8 kN

¹) EN 13374:2013
 $Q_{k,i} \times \gamma_F^* = E_d \leq R_d = R_k / \gamma_{M,mod}^{**}$
 * $\gamma_F = 1,5$ ** for timber

