











PART NO. 912119, 912125

# PRECAST BRACKET


Avstängarfäste | Avstengerfeste | Statramscio laikiklis | Prekast braketi | Deckenrandbefestigung

-  L: 118/135 mm
-  W: 60 mm
-  H: 325/316 mm
-  1,5 kg
-  Steel + Zn (hot dip galvanized)
-  EN13374 – A



-   1,03 × 0,91 × 0,65 m
-  340 kg
-  200 pcs



#912119

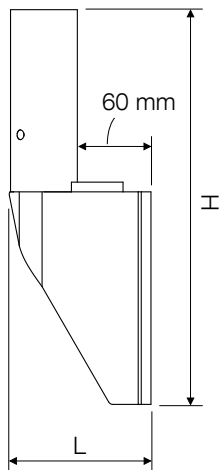


#912125

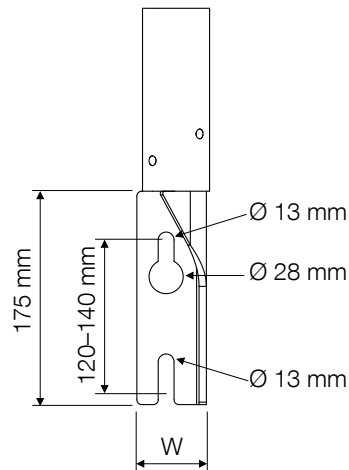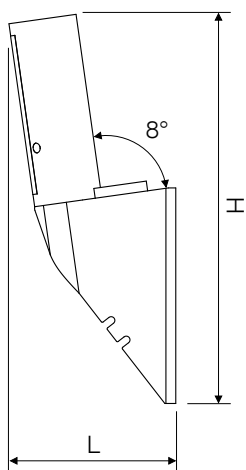

ANCHOR LOADS (Q) <sup>1</sup>		(Per anchor, unfactored)
	#912119	#912125
N <sub>k</sub>	5,6 kN	6,1 kN
V <sub>k</sub>	1,6 kN	1,6 kN

<sup>1</sup>) EN 13374:2013  
 $Q_{k,i} \times \gamma_F^* = E_d \leq R_d = R_k / \gamma_M (k_{mod}^{**})$   
 \*  $\gamma_F = 1,5$       \*\* for timber

#912119



#912125

