















PART NO. 5041006

# VT ALU BEAM CLAMP, ROUND

VT Alu Beam Clamp, rund | VT Staanderbevestiging alu liggers

-  L: 212 mm
-  W: 196 mm
-  H: 345 mm
-  3,6 kg
-  Steel + Zn (electrogalvanized)
-  EN13374 – A

-   1,24 × 0,84 × 0,97 m
-  440 kg
-  100 pcs

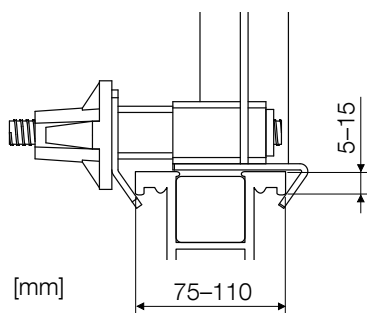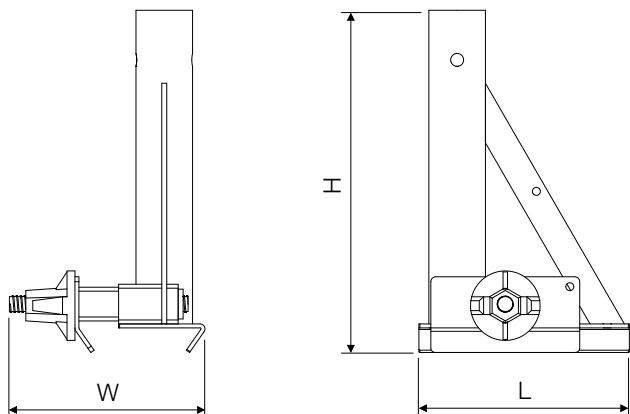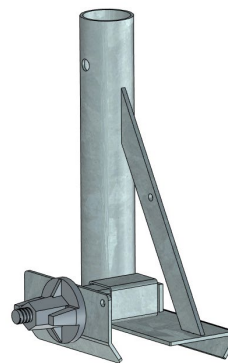

BENDING MOMENT (Q) <sup>1</sup> (Unfactored)	
M <sub>k</sub>	720 Nm
<sup>1</sup> ) Loads acc. to EN 13374:2013 $Q_{ik} \times \gamma_F^* = E_d \leq R_d = R_k / \gamma_M (k_{mod}^{**})$ * $\gamma_F = 1,5$ ** for timber	

