











PART NO. 912174




WOODEN BEAM CLAMP

Träbalkstving | Trebjelkefeste | Medinės sijos apkaba | Holzbalkenzwinge

-  L: 250 mm
-  W: 86 mm
-  H: 433 mm
-  3,2 kg
-  Steel + Zn (hot dip galvanized)
-  EN13374 – A



-  1,03 × 0,91 × 0,65 m
-  200 kg
-  50 pcs

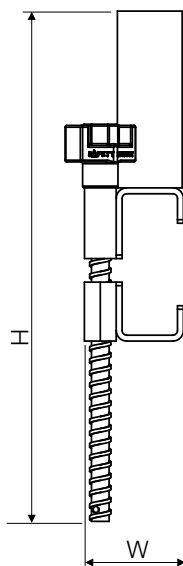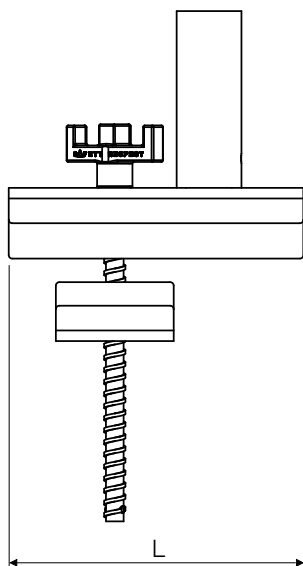

BENDING MOMENT (Q) ¹⁾ (Unfactored)	
M_k	630 Nm
¹⁾ Loads acc. to EN 13374:2013 $Q_{k0} \times \gamma_F^* = E_d \leq R_d = R_k / \gamma_M (k_{mod}^{**})$ $\gamma_F^* = 1,5$ ** for timber	

